

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
3 January 2002 (03.01.2002)

PCT

(10) International Publication Number  
**WO 02/01743 A1**

(51) International Patent Classification<sup>7</sup>: **H04B 1/69**

(21) International Application Number: PCT/KR01/01103

(22) International Filing Date: 27 June 2001 (27.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2000/35793 27 June 2000 (27.06.2000) KR

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD**  
[KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-shi,  
Kyungki-do 442-370 (KR).

(72) Inventors: **HUH, Hoon**; 191-9, Seokbong-dong, Dae-  
dok-gu, Daejeonkwangyok-shi 306-190 (KR). **YUN,**


**Yu-Suk**; 954-21, Daechi-dong, Kangnam-gu, Seoul  
135-280 (KR). **YOON, Soon-Young**; 185, Gaepo-dong,  
Kangnam-gu, Seoul 135-240 (KR). **YEOM, Jae-Heung**;  
Dogok Jugong Apt., #6-201, Daechi 1-dong, Kangnam-gu,  
Seoul 135-281 (KR). **YANG, Sang-Hyun**; 340-42, Haeng-  
dang 2-dong, Songdong-gu, Seoul 133-072 (KR). **KANG,**  
**Hee-Won**; Ahleumsamho Apt., #401-1503, Imae-eong,  
Pundang-gu, Songnam-shi, Kyonggi-do 463-060 (KR).

(74) Agent: **LEE, Keon-Joo**; Mihwa Building, 110-2, Myon-  
gryun-dong 4-ga, Chongro-gu, Seoul 110-524 (KR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,  
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,  
TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR CONTROLLING PACKET TRANSMISSION IN A MOBILE TELECOMMUNICATION SYSTEM

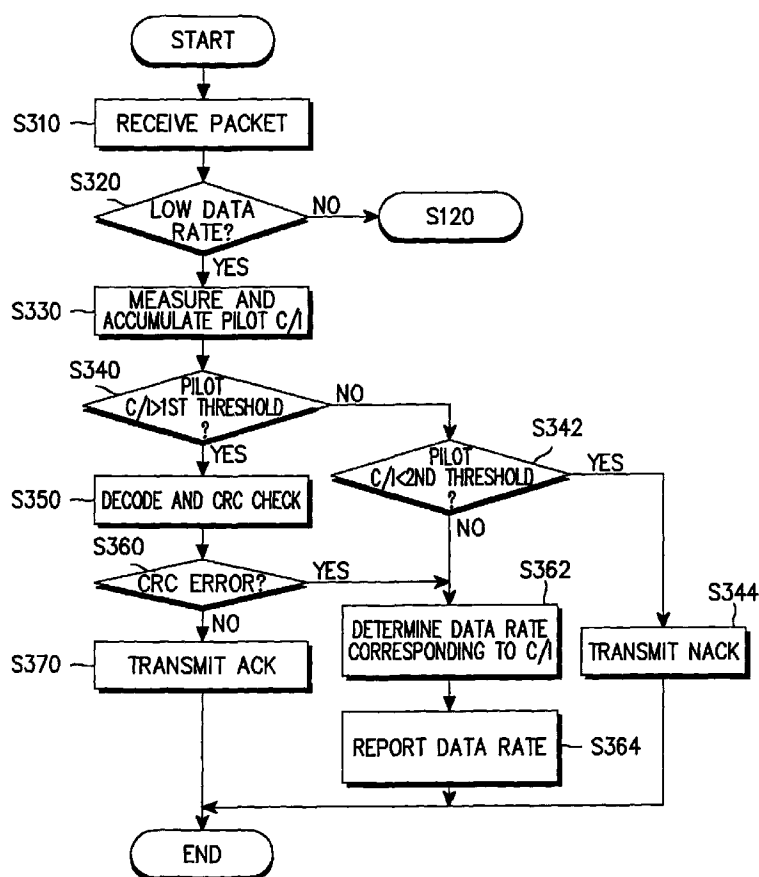

(57) Abstract: Disclosed is a method of adapting a mobile telecommunication system to channel conditions. To control transmission of a data packet from an access network (AN) in both a link adaptation scheme and an ARQ (Automatic Repeat reQuest) scheme, an access terminal (AT) compares the received power of a forward pilot signal received from the AN with a predetermined first threshold, checks errors in the data packet of a received time slot if the reception power is greater than the first threshold, and transmits a signal requesting termination of retransmission of the data packet to the AN if no errors are found in the data packet after decoding.

WO 02/01743 A1



**(84) Designated States (regional):** European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

— *entirely in electronic form (except for this front page) and available upon request from the International Bureau*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**METHOD AND APPARATUS**  
**FOR CONTROLLING PACKET TRANSMISSION**  
**IN A MOBILE TELECOMMUNICATION SYSTEM**

5

**BACKGROUND OF THE INVENTION**

**1. Field of the Invention**

10 The present invention relates generally to a method and apparatus for transmitting packets in a mobile telecommunication system, and in particular, to a method and apparatus for controlling transmission of data packets from an AN (Access Network) according to forward channel conditions by an AT (Access Terminal) in both a link adaptation scheme and an ARQ (Automatic Repeat reQuest) scheme.

15

**2. Description of the Related Art**

20 Mobile telecommunication systems typically include ATs and ANs. As a result of attenuation variations along a propagation path, severe inter-system interference, and fading according to a path distance and shadowing, the carrier-to-interference ratio (C/I) of a radio channel may significantly change depending on channel conditions. Link adaptation is a scheme of adapting a data rate to channel conditions such as received C/I in order to increase channel throughput. In the link adaptation scheme, the data rate is determined according to a code rate and a modulation. A link adaptation system increases a data rate by means of  
25 high code rate codes and high-level modulation when a received C/I is high. If the received C/I is low, the link adaptation system decreases the data rate by means of low code rate codes and low level modulation and retransmits packets selectively to thereby increase channel reliability.

30

In an HDR (High Data Rate) system standardized by the 3GPP2 (3<sup>rd</sup> Generation Partnership Project 2), physical layers using link adaptation on the forward link can be transmitted in 13 ways according to three modulation schemes, QPSK (Quadrature Phase Shift Keying), 8PSK (8-ary Phase Shift Keying), and 16QAM (16-ary Quadrature Amplitude Modulation), three code  
35 rates, 1/4, 3/8 and 1/2, and the number of slots in which a packet is repeatedly transmitted.

FIG. 1 illustrates HDR forward and reverse links. Referring to FIG. 1, an

-2-

HDR packet includes 2048 chips per slot and a pilot channel in each half slot is assigned to 96 chips. Since the pilot channel is transmitted with the same power as that of a traffic channel, the C/I of the pilot channel is equal to that of the traffic channel. The pilot C/I becomes a criterion by which a code rate and modulation are determined.

FIG. 2 is a flowchart illustrating a packet transmission requesting procedure in a conventional HDR system. Referring to FIG. 2, upon receipt of a packet in each slot, an AT analyzes the preamble of the packet, checks whether the packet is destined for the AT, and if it is, checks whether an AN transmitted the packet at a data rate requested by the AT by detecting the length of the preamble in step S110. The AT measures the received C/I of a pilot signal in the packet in step S120 and determines a data rate corresponding to the received C/I in step S130. The AT feeds back information about the determined data rate in step S140. Here, the data rate information is called DRC (Data Rate Control) information, which is transmitted in each slot on a reverse DRC channel as shown in FIG. 1.

If the determined data rate is low, the AN transmits the packet repeatedly to ensure channel reliability. FIG. 3 illustrates packet lengths versus data rates on the HDR forward link. Referring to FIG. 3, the same packet is transmitted 16 times at 38.4kbps and 8 times at 76.8kbps. The packet is transmitted once at a high data rate of from 614.4 through 2457.6kbps.

Despite the advantage of increased channel reliability, the repeated transmission of one packet results in the increase of channel estimation errors, slow adaptation of a code rate and modulation to channel changes, and dissipation of radio resources because one packet occupies a long slot period. In addition, since the HDR forward link is subject to TDM (Time Division Multiplexing) between users, if the users occupy many time slots at low data rates, the overall throughput is reduced.

On the other hand, in the case of ARQ, the AT performs a CRC (Cyclic Redundancy Code) check on a received packet and requests packet retransmission to the AN only if the packet has errors. Therefore, a data rate is virtually decreased and channel reliability is increased. In an advanced hybrid ARQ scheme, packet reliability is further increased by reducing a code rate in packet retransmission using error correction codes or by decoding packets of the same

sequence number in combination.

FIG. 4 is a flowchart illustrating a packet retransmission requesting procedure in a conventional hybrid ARQ (HARQ) system. Referring to FIG. 4, an AT receives a packet in step S210 and accumulates packet symbols by combining the received packet with previously received packets of the same sequence number in step S220. The AT decodes the packet symbols and performs a CRC check in step S230 and determines whether CRC errors exist in step S240. If no CRC errors are found, the AT transmits an ACK (Acknowledgment) signal to an AN and the decoded data to an upper layer in step S250. The decoded data is processed in the upper layer and the accumulated symbols are discarded in step S260. On the other hand, if CRC errors are found, the AT requests retransmission of the same packet to the AN in step S245.

As described above, the CRC check is performed after decoding a received packet in ARQ. If a channel condition is very bad, errors will be detected continuously in the CRC check and retransmission will be requested continuously. Therefore, much power is dissipated for repeated decoding and a feedback delay is prolonged as much time as required for the decoding. This implies that the AT needs a memory of capacity large enough to store many packets.

Link adaptation and ARQ increase channel throughput by adapting a transmission scheme and the number of transmission times to channel conditions. Yet, the former may decrease the throughput by repeated packet transmission, whereas the latter has the problems of power dissipation, increased delay time, and the requirement of a large capacity memory.

## SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a method and apparatus for increasing a channel adaptation speed and as a result, increasing throughput in both a link adaptation and an ARQ mobile telecommunication system.

Another object of the present invention is to provide a method and apparatus for checking packet errors after determining whether decoding should be performed or not in link adaptation and ARQ.

A further object of the present invention is to provide a method and apparatus for determining whether a packet is to be retransmitted according to a received C/I measurement in link adaptation and ARQ.

5

Still another object of the present invention is to provide a method and apparatus for determining whether a packet is to be decoded according to a received C/I measurement in link adaptation and ARQ.

10

The foregoing and other objects of the present invention can be achieved by a method of adapting a mobile telecommunication system to channel conditions. To control transmission of a data packet from an AN in both a link adaptation scheme and an ARQ scheme, an access terminal (AT) compares the received C/I of a forward pilot signal received from the AN with a predetermined first threshold, checks errors in the data packet of a received time slot if the received C/I is greater than the first threshold, and transmits a signal requesting termination of retransmission of the data packet to the AN if no errors are found in the data packet after decoding.

15

20

## BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

25

FIG. 1 illustrates HDR forward and reverse links;

FIG. 2 is a flowchart illustrating a packet retransmission requesting procedure in a conventional HDR system;

FIG. 3 illustrates packet transmission according to HDR forward data rates;

30

FIG. 4 is a flowchart illustrating a packet retransmission requesting procedure in a conventional hybrid ARQ system;

FIG. 5 is a flowchart illustrating a packet transmission control operation in high data rate system according to an embodiment of the present invention;

35

FIG. 6 illustrates high data rate system forward and reverse links according to the embodiment of the present invention;

FIG. 7 is a block diagram of a transmitter in high data rate system AT according to the embodiment of the present invention; and

FIG. 8 is a flowchart illustrating a packet transmission control operation

in a hybrid ARQ system according to another embodiment of the present invention.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will be described hereinbelow with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

Terms used herein will first be defined.

ACK: a signal requesting discontinuation of retransmission of a packet if a received packet has no errors;

NACK: a signal requesting discontinuation of retransmission of a packet if errors are sure to be generated in the packet even if it is retransmitted;

Current packet: a packet with a sequence number to be received at the present time; and

Identical packets: packets with the same sequence number.

FIG. 5 is a flowchart illustrating a packet transmission control operation in an HDR system according to an embodiment of the present invention. Referring to FIG. 5, upon receipt of a packet in each slot, an AT analyses the preamble of the packet, checks whether the packet is destined for the AT in step S310. If it is, the AT determines the length of the preamble and checks whether the data rate of the packet is a low data rate in step S320. Here, a low data rate is defined as a data rate at which the same packet is transmitted at least twice. In the case of a high data rate without packet retransmission, the AT measures the pilot C/I of the received packet in step S120 and determines a data rate corresponding to the received C/I in step S130 in the conventional procedure of FIG. 2.

In the case of a low data rate (repeated packet transmission), the AT measures the received C/I of a forward pilot channel or a forward pilot symbol in the time period of the current packet in step S330.. If the pilot C/I of the current packet has already been measured, in other words, if the current packet was received previously, the AT calculates the accumulated pilot C/I of the same packets.

In step S340, the AT compares the measured pilot C/I or the accumulated pilot C/I with a predetermined first threshold. The first threshold is the lowest value that ensures a packet error rate below a predetermined value after packet decoding. The first threshold can be calculated by accumulating a C/I corresponding to the data rate of the current packet as many times as the maximum number of packet transmissions. The AT searches for a C/I corresponding to the current data rate in a C/I table listing C/I requirements versus data rates and determines the first threshold utilizing the C/I. Table 1 shown below illustrates C/I values required for data rates, and the resulting first thresholds.

(Table 1)

Data rate	Required C/I	Packet repetition	First threshold
38.4 kbps	-12.0 dB	16	0 dB
76.8 kbps	-9.0 dB	8	0 dB
102.4 kbps	-7.8 dB	6	0 dB
153.6 kbps	-6.0 dB	4	0 dB
204.8 kbps	-4.8 dB	3	0 dB
307.2 kbps	-3.0 dB	2	0 dB
614.4 kbps	0.0 dB	1	0 dB
921.6 kbps	2.0 dB	1	2 dB
1228.8 kbps	4.0 dB	1	4 dB
1843.2 kbps	7.0 dB	1	7 dB
2457.6 kbps	10.0 dB	1	10 dB

If the pilot C/I is greater than the first threshold, the AT decodes the current packet and performs an error check in step S350. The error check can be performed in many ways. In the present invention, a CRC error checks is performed.

If no errors are found in the CRC check in step S360, the AT transmits an ACK signal to the AN and the packet to an upper layer in step S370. As stated before, the ACK signal indicates that the received packet has no errors. Upon receipt of the ACK signal, the AN discontinues retransmission of the packet and initiates transmission of the next packet. On the other hand, if errors are found in the CRC check in step S360, the AT determines a data rate corresponding to the pilot C/I in step S362 and transmits DRC(Data Rate Control) information



indicating the determined data rate to the AN in step S364. Upon receipt of the DRC information, the AN retransmits the packet at the requested data rate.

If the pilot C/I is equal to or less than the first threshold in step S340, the AT compares the pilot C/I with a predetermined second threshold in step S342. The second threshold is a pilot C/I or an accumulated pilot C/I with which packet errors are sure to exist even if the current packet is repeatedly transmitted a total slot number of times.

If the pilot C/I is less than the second threshold, the AT quits decoding and transmits a NACK signal to the AN to discontinue the retransmission of the current packet in step S344. As stated before, the NACK signal indicates that the received packet is abnormal. In this case, the upper layer considers the current packet as an error. Upon receipt of the NACK signal, the AN discontinues the retransmission of the packet, or retransmits the packet from the beginning slot. If the pilot C/I is greater than or equal to the second threshold, the AT determines the data rate corresponding to the pilot C/I in step S362 and transmits the DRC information to the AN in step S364. Upon receipt of the DRC information, the AN retransmits the packet at the requested data rate.

The second threshold is calculated by

$$\begin{aligned} \text{second threshold} &= (\text{required C/I} \times \text{total number of slots for current packet} \div \text{margin}) \\ &\quad \times \frac{\text{number of slots transmitted for current packet}}{\text{total number of slots for current packet}} \\ &= (\text{required C/I} \div \text{margin}) \times \text{number of slots transmitted for current packet} \\ &\quad \dots\dots (1) \end{aligned}$$

or

$$\begin{aligned} \text{second threshold [dB]} &= \text{required C/I [dB]} - \text{margin [dB]} \\ &\quad + 10 \times \log_{10} (\text{number of slots transmitted for current packet}) \\ &\quad \dots\dots (2) \end{aligned}$$

The second threshold is calculated by dividing the required C/I corresponding to a current data rate by a predetermined margin and multiplying the number of already transmitted slots for the current packet. The second threshold varies with the number of transmitted slots. The margin is determined according to the reliability of the second threshold. If the reliability of NACK is to be high, the margin increases and if the reliability of NACK is to be low, the

margin drops.

Now there will be given a description of a second threshold when five slots were transmitted at 76.8kbps. A required C/I is  $-9.0\text{dB}$  according to Table 1 and a margin is given as  $3.0\text{dB}$ . The number of slots already transmitted is  $10 \cdot \log(5) = 7.0$  in dB scale. Then, the second threshold is  $-9.0\text{dB} - 3.0\text{dB} + 7.0\text{dB} = -5.0\text{dB}$ . Table 2 lists second thresholds versus transmitted slot numbers at 76.8kbps.

(Table 2)

Number of transmitted slots	Second threshold
1	$-12.0\text{ dB}$
2	$-9.0\text{ dB}$
3	$-7.2\text{ dB}$
4	$-6.0\text{ dB}$
5	$-5.0\text{ dB}$
6	$-4.2\text{ dB}$
7	$-3.6\text{ dB}$
8	$-3.0\text{ dB}$

As described above, the AT transmits one of DRC, ACK, and NACK to the AN on the DRC channel according to the pilot C/I comparison result and the CRC check result.

Table 3 illustrates information examples transmitted on the DRC channel according to the embodiment of the present invention.

(Table 3)

DRC symbol	Information
0000	38.4 kbps
0001	76.8 kbps
0010	102.4 kbps
0011	153.6 kbps (short)
0100	153.6 kbps (long)
0101	204.8 kbps
0110	307.2 kbps (short)
0111	307.2 kbps (long)

1000	614.4 kbps
1001	921.6 kbps
1010	1228.8 kbps
1011	1843.2 kbps
1100	2457.6 kbps
1101	ACK
1110	not used
1111	NACK

Referring to Table 3, values 0000 to 1100 of the 4-bit DRC symbol indicate data rates, 1101 indicates ACK, and 1111 indicates NACK. Short and long in Table 3 indicate a short packet and a long packet, respectively.

5

FIG. 6 illustrates the relationship in slot transmission/reception between the forward link and the reverse link in the HDR system according to the embodiment of the present invention. In FIG. 6, the AN repeatedly transmits a packet in slots on the forward link (AN Tx). Upon receipt of each slot, the AT feeds back one of DRC, ACK, and NACK on the reverse DRC channel (AT Tx).

10

FIG. 7 is a block diagram of a transmitter in an HDR AT according to the embodiment of the present invention. Referring to FIG. 7, a C/I measurer 110 measures the C/I of a pilot channel or a pilot symbol received from an AN. A C/I accumulator 120 determines whether the same packet was received previously and accumulates the pilot C/I values of the packets if the same packet exists. A C/I comparator 130 compares the accumulated pilot C/I with a first threshold and a second threshold, respectively and transmits the comparison results to a DRC controller 170. The DRC controller 170 determines a data rate corresponding to the measured pilot C/I and generates a DRC symbol representative of the data rate.

15

20

A traffic symbol accumulator 140 accumulates the traffic symbols of the same packets and a decoder 150 decodes the accumulated traffic symbols only if the accumulated pilot C/I is greater than the first threshold. A CRC checker 160 performs a CRC check on the decoded traffic symbols and transmits the check result to the DRC controller 170.

25

The DRC controller 170 selects one of ACK, NACK, and a DRC symbol from a memory 180 based on the C/I comparison results and CRC check result and transmits the selected signal on a reverse DRC channel. The memory 180

30

stores information shown in Table 1 to be transmitted on the DRC channel.

Modifications can be made to the above embodiment of the present invention. For example, if the accuracy of received C/I measurement (i.e., received C/I measurement) is maintained within a predetermined range, the ACK signal can be transmitted directly without the CRC check. That is, the AT compares the received C/I of a forward pilot signal with the first threshold in step S340 and if the received C/I is greater than the first threshold, it transmits the ACK signal directly to the AN in step S370, as shown in FIG. 5.

It can be further contemplated that if the received C/I is equal to or less than the first threshold in step S340, it jumps to steps S362 and S364 and requests packet retransmission to the AN.

The AT can compare the received C/I with the second threshold in step S342 before comparing it with the first threshold and if the received C/I is less than the second threshold, the AT can transmit the NACK signal directly to the AN in step S344.

FIG. 8 is a flowchart illustrating a packet retransmission requesting procedure in a hybrid ARQ system according to another embodiment of the present invention. Referring to FIG. 8, upon receipt of a packet from an AN in step S410, an AT measures the C/I of a pilot channel in the time period when the packet is transmitted (hereinafter, referred to as the current packet period). If the measured pilot C/I of the same packet exists, the AT accumulates the pilot C/I of the current packet to the existing pilot C/I in step S420. In step S430, if the same packet was received previously, the AT accumulates the traffic symbols of the same packets in steps S430. In the case of non-hybrid ARQ, the traffic symbols are not accumulated in step S430.

The AT compares the pilot C/I measurement or the accumulated pilot C/I with a predetermined first threshold in step S440. The first threshold is calculated by accumulating a C/I corresponding to the data rate of the current packet as many times as the number of packet occurrences. If the pilot C/I is greater than the first threshold, the AT decodes the accumulated traffic symbols and performs a CRC check on the decoded traffic symbols in step S450.

If no errors are found in the CRC check in step S460, the AT feeds back

the ACK signal to the AN so that the AN discontinues retransmission of the current packet in step S470. The AT transmits the current packet to an upper layer and discards the decoded data and the pilot C/I in step S480. If errors are found in the CRC check in step S460, the AT transmits a signal requesting retransmission of the current packet to the AN in step S462.

On the other hand, if the pilot C/I is equal to or less than the first threshold, the AT compares the pilot C/I with a predetermined second threshold in step S442. The second threshold is a value at which packet errors are sure to be generated even if the current packet is transmitted as many times as allowed for the packet. The second threshold varies with the number of packet occurrences. In the ARQ system, the second threshold is calculated by dividing a required C/I corresponding to the current data rate by a predetermined margin, and multiplying the number of occurrence of the current packet, as in Eq (1).

If the pilot C/I is less than the second threshold, the AT transmits the NACK signal to the AN in step S446. Upon receipt of the NACK signal, the AN initiates transmitting the packet from the beginning slot, or gives up retransmission of the packet and allocates the resources assigned for the packet to another user. If the pilot C/I is greater than or equal to the second threshold, the AT transmits the signal requesting retransmission of the packet to the AN in step S462.

In the second embodiment of the present invention as described above, if the received pilot C/I is greater than the first threshold and CRC errors are found, and if the received pilot C/I is equal to or less than the first threshold and greater than a second threshold, the AT transmits the retransmission request signal to the AN.

Similarly to the first embodiment of the present invention, modifications can be made to the second embodiment. If the accuracy of received C/I measurement is maintained within a predetermined range, the ACK signal can be transmitted directly without the CRC check. The AT compares the received C/I of a forward pilot signal with the first threshold in step S440 and if the received C/I is greater than the first threshold, it transmits the ACK signal directly to the AN in step S470.

If the received C/I is equal to or less than the first threshold in step S440,

it jumps to step S462 and requests packet retransmission to the AN.

5       The AT can compare the received C/I with the second threshold in step 442 before comparing it with the first threshold and if the received C/I is less than the second threshold, the AT can transmit the NACK signal directly to the AN in step S446.

10       The present invention has the following advantages: (1) unnecessary decoding and CRC check can be omitted by performing decoding and a CRC check according to a received C/I measurement in both a link adaptation system and an ARQ system. Therefore, channel throughput is increased, the power required for decoding is reduced, and the decrease of feedback time reduces the required capacity of a memory in a transmitter; and (2) unnecessary packet retransmission is prevented by estimating reception link conditions and  
15       transmitting the ACK or NACK signal according to the received C/I measurement.

20       While the invention has been shown and described with reference to certain preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A method of controlling transmission of a data packet from an access network (AN) in an access terminal (AT) of a mobile telecommunication system where the AN transmits the data packet in successive time slots, each slot having a plurality of data bits, and the AT receives the data packet from the AN, the method comprising the steps of:

comparing a received C/I of a forward pilot signal received from the AN with a predetermined first threshold;

checking for errors in the data packet in a received time slot if the received power is greater than the first threshold; and

transmitting a signal requesting termination of retransmission of the data packet to the AN if no errors are found in the data packet after said checking.

2. The method of claim 1, further comprising the steps of:

determining whether it is a low data rate using a length of a preamble of the received data packet; and

proceeding further with the comparison step if the determined data rate is the low data rate, wherein the low data rate repeatedly transmits the same packet two times or more.

3. The method of claim 1, further comprising the steps of:

determining a data rate corresponding to the received power if errors are found in the data packet in the error check; and

requesting retransmission of the data packet by transmitting the determined data rate to the AN.

4. The method of claim 1, further comprising the steps of:

determining a data rate corresponding to the received power if the received power is equal to or less than the first threshold; and

requesting retransmission of the data packet by transmitting the determined data rate to the AN.

5. The method of claim 1, further comprising the steps of:

comparing the received power with a predetermined second threshold if the received power is equal to or less than the first threshold; and

transmitting the signal requesting termination of retransmission of the data packet to the AN if the received power is less than the second threshold.

6. The method of claim 5, further comprising the steps of:  
determining the data rate corresponding to the received power if the  
received power is equal to or greater than the second threshold; and  
requesting retransmission of the data packet by transmitting the  
determined data rate to the AN.

7. The method of any of claims 1,4 and 5, the first threshold is  
calculated by accumulating a C/I corresponding to the data rate of the current data  
packet as many times as the maximum number of the data packet transmissions.

8. The method as claimed in either of claims 5 and 6, the second threshold is  
calculated by dividing the required C/I corresponding to a current data rate by a  
predetermined margin and multiplying the number of already transmitted slots for  
the current data packet

9. A method of controlling transmission of a data packet from an  
access network (AN) in an access terminal (AT) of a mobile telecommunication  
system where the AN transmits the data packet in successive time slots each  
having a plurality of data bits and the AT receives the data packet from the AN [],  
the method comprising the steps of:

comparing a received C/I of a forward pilot signal received from the AN  
with a predetermined first threshold; and

transmitting a signal requesting termination of retransmission of the data  
packet to the AN if the received power is greater than the first threshold.

10. The method of claim 9, further comprising the steps of:  
determining whether it is a low data rate using a length of a preamble of  
the received data packet; and  
proceeding further with the comparison step if the determined data rate is  
the low data rate, wherein the low data rate repeatedly transmits the same packet  
two times or more.

11. The method of claim 9, further comprising the steps of:  
determining a data rate corresponding to the received power if the  
received power is equal to or less than the first threshold; and  
requesting retransmission of the data packet by transmitting the  
determined data rate to the AN.



12. The method of claim 11, further comprising the steps of:  
comparing the received power with a predetermined second threshold if  
the received power is equal to or less than the first threshold; and  
5 transmitting the signal requesting termination of retransmission of the  
data packet to the AN if the received power is less than the second threshold.

13. The method of claim 12, further comprising the steps of:  
determining the data rate corresponding to the received power if the  
10 received power is equal to or greater than the second threshold; and  
requesting retransmission of the data packet by transmitting the  
determined data rate to the AN.

14. The method of any of claims 9 to 13, wherein the first threshold  
15 can be calculated by accumulating a C/I corresponding to the data rate of the  
current data packet as many times as the maximum number of data packet  
transmissions

15. The method as claimed in either of claims 12 and 13, wherein the  
20 second threshold is calculated by dividing the required C/I corresponding to a  
current data rate by a predetermined margin and multiplying the number of  
already transmitted slots for the current data packet

16. A method of controlling transmission of a data packet from an  
25 access network (AN) in an access terminal (AT) of a mobile telecommunication  
system where the AN transmits the data packet in successive time slots each  
having a plurality of data bits and the AT receives the data packet from the AN,  
the method comprising the steps of:

comparing a received C/I of a forward pilot signal received from the AN  
30 with a predetermined threshold; and  
transmitting a signal requesting termination of retransmission of the data  
packet to the AN if the received power is less than the threshold.

17. The method of claim 16, further comprising the steps of:  
35 determining whether it is a low data rate using a length of a preamble of  
the received data packet; and  
Proceeding further with the comparison step if the determined data rate is  
the low data rate, wherein the low data rate repeatedly transmits the same data

packet two times or more.

18. The method of claim 16, the threshold is calculated by multiplying a received C/I corresponding to a current data rate by the maximum number of data packet transmissions, subtracting a predetermined margin from the product, and multiplying the difference by a ratio of the number of already transmitted slots to the total number of slots transmittable for the data packet.

19. A method of controlling transmission of a data packet from an access network (AN) in an access terminal (AT) of a mobile telecommunication system where the AN transmits the data packet in successive time slots each having a plurality of data bits and the AT receives the data packet from the AN, the method comprising the steps of:

comparing a received C/I of a forward pilot signal received from the AN with a predetermined first threshold;

determining a data rate corresponding to the received power if the received power is less than or equal to the first threshold; and

requesting retransmission of the data packet to the AN by transmitting the determined data rate to the AN.

20. The method of claim 19, further comprising the steps of:

determining whether it is a low data rate using a length of a preamble of the received data packet; and

proceeding further with the comparison step if the determined data rate is the low data rate, wherein the low data rate repeatedly transmits the same data packet two times or more.

21. The method of claim 19, further comprising the steps of:

comparing the received power with a predetermined second threshold if the received power is equal to or less than the first threshold;

determining the data rate corresponding to the received power if the received power is equal to or greater than the second threshold; and

requesting retransmission of the data packet by transmitting the determined data rate to the AN.

22. The method of any of claims 19 to 21, the first threshold is

calculated by accumulating a C/I corresponding to the data rate of the current data packet as many times as the maximum number of data packet transmissions

23. The method of claim 21, the second threshold is calculated by dividing the required C/I corresponding to a current data rate by a predetermined margin and multiplying the number of already transmitted slots for the current data packet

24. A method of controlling transmission of a data packet from an access network (AN) in an access terminal (AT) of a mobile telecommunication system where the AN transmits the data packet in successive time slots each having a plurality of data bits and the AT receives the data packet from the AN, the method comprising the steps of:

comparing a received C/I of a forward pilot signal received from the AN with a predetermined first threshold; and

requesting retransmission of the data packet by transmitting a determined data rate to the AN if the received power is equal to or less than the first threshold.

25. The method of claim 24, further comprising the steps of:  
determining whether it is a low data rate using a length of a preamble of the received data packet; and

proceeding further with the comparison step if the determined data rate is the low data rate, wherein the low data rate repeatedly transmits the same data packet two times or more.

26. The method of claim 24, further comprising the steps of:  
comparing the received power with a predetermined second threshold if the received power is equal to or less than the first threshold; and  
requesting retransmission of the data packet to the AN if the received power is equal to or greater than the second threshold.

27. The method of any of claims 24 to 26, the first threshold is calculated by accumulating a C/I corresponding to the data rate of the current data packet as many times as the maximum number of data packet transmissions

28. The method of claim 26, the second threshold is calculated by dividing the required C/I corresponding to a current data rate by a predetermined margin and multiplying the number of already transmitted slots for the current data packet

29. An apparatus for controlling transmission of a data packet from an access network (AN) in an access terminal (AT) of a mobile telecommunication system where the AN transmits the data packet in successive time slots each having a plurality of data bits and the AT receives the data packet from the AN, the apparatus comprising:

a device for comparing a C/I of a forward pilot signal received from the AN with a predetermined first threshold;

a device for decoding a data packet in a received time slot and checking for errors in the decoded data packet if the received power is greater than the first threshold; and

a device for transmitting a signal requesting termination of retransmission of the data packet to the AN if no errors are found in the data packet.

30. The apparatus of claim 29, the comparator detects the length of the data preamble of the received time slot, determines whether that is the low data rate and performs the comparison if the determined data rate is a low data rate, wherein the low data rate repeatedly transmits the same data packet two times or more.

31. The apparatus of claim 29, further comprising:

a device for determining a data rate corresponding to the received power if errors are found in the decoded data packet; and

a device for requesting retransmission of the data packet by transmitting the determined data rate to the AN.

32. The apparatus of claim 31, further comprising:

a device for determining a data rate corresponding to the received power if the received power is equal to or less than the first threshold; and

a device for requesting retransmission of the data packet by transmitting the determined data rate to the AN.

33. The apparatus of claim 31, further comprising:

a device for comparing the received power with a predetermined second threshold if the received power is equal to or less than the first threshold; and

a device for transmitting the signal requesting termination of retransmission of the data packet to the AN if the received power is less than the

second threshold.

34. The apparatus of claim 33, further comprising:

5 a device for determining the data rate corresponding to the received power if the received power is equal to or greater than the second threshold; and  
a device for requesting retransmission of the data packet by transmitting the determined data rate to the AN.

35. The apparatus of any of claims 29 to 34, the first threshold is

10 calculated by accumulating a C/I corresponding to the data rate of the current data packet as many times as the maximum number of data packet transmissions

36. The apparatus as claimed in either of claims 33 and 34, the second

15 threshold is calculated by dividing the required C/I corresponding to a current data rate by a predetermined margin and multiplying the number of already transmitted slots for the current data packet

37. An apparatus for controlling transmission of a data packet from

20 an access network (AN) in an access terminal (AT) of a mobile telecommunication system where the AN transmits the data packet in successive time slots each having a plurality of data bits and the AT receives the data packet from the AN, the apparatus comprising:

a device for comparing a received C/I of a forward pilot signal received from the AN with a predetermined first threshold; and

25 a device for transmitting a signal requesting termination of retransmission of the data packet to the AN if the received power is greater than the first threshold.

38. The apparatus of claim 37, the comparator detects the length of

30 the data preamble of the received time slot, determines whether that is the low data rate and performs the comparison if the determined data rate is a low data rate, wherein the low data rate repeatedly transmits the same data packet two times or more.

39. The apparatus of claim 37, further comprising:

35 a device for determining a data rate corresponding to the received power if the received power is equal to or less than the first threshold; and

a device for requesting retransmission of the data packet by transmitting

the determined data rate to the AN.

40. The apparatus of claim 37, further comprising:

a device for comparing the received power with a predetermined second threshold if the received power is equal to or less than the first threshold; and

a device for transmitting the signal requesting termination of retransmission of the data packet to the AN if the received power is less than the second threshold.

41. The apparatus of claim 40, further comprising:

a device for determining a data rate corresponding to the received power if the received power is equal to or greater than the second threshold; and

a device for requesting retransmission of the data packet by transmitting the determined data rate to the AN.

42. The apparatus of any of claims 37 to 41, wherein the first threshold is calculated by accumulating a C/I corresponding to the data rate of the current data packet as many times as the maximum number of data packet transmissions.

43. The apparatus as claimed in either of claims 40 and 41, wherein the second threshold is calculated by dividing the required C/I corresponding to a current data rate by a predetermined margin and multiplying the number of already transmitted slots for the current data packet.

44. An apparatus for controlling transmission of a data packet from an access network (AN) in an access terminal (AT) of a mobile telecommunication system where the AN transmits the data packet in successive time slots each having a plurality of data bits and the AT receives the data packet from the AN, the method comprising:

a device for comparing a received C/I of a forward pilot signal received from the AN with a predetermined threshold; and

a device for transmitting a signal requesting termination of retransmission of the data packet to the AN if the received power is less than the threshold.

45. The apparatus of claim 44, the comparator detects the length of

the data preamble of the received time slot, determines whether that is the low data rate and performs the comparison if the determined data rate is a low data rate, wherein the low data rate repeatedly transmits the same data packet two times or more.

5

46. The apparatus as claimed in either of claims 44 and 45, the threshold is calculated by multiplying a received C/I corresponding to a current data rate by the maximum number of data packet transmissions, subtracting a predetermined margin from the product, and multiplying the difference by a ratio of the number of already transmitted slots to the total number of slots transmittable for the data packet.

10

47. An apparatus for controlling transmission of a data packet from an access network (AN) in an access terminal (AT) of a mobile telecommunication system where the AN transmits the data packet in successive time slots each having a plurality of data bits and the AT receives the data packet from the AN, the apparatus comprising:

15

a device for comparing a received C/I of a forward pilot signal received from the AN with a predetermined first threshold;

20

a device for determining a data rate corresponding to the received power if the received power is less than or equal to the first threshold; and

a device for requesting retransmission of the data packet to the AN by transmitting the determined data rate to the AN.

25

48. The apparatus of claim 47, the comparator detects the length of the data preamble of the received time slot, determines whether that is the low data rate and performs the comparison if the determined data rate is a low data rate, wherein the low data rate repeatedly transmits the same data packet two times or more.

30

49. The apparatus of claim 47, further comprising:

a device for comparing the received power with a predetermined second threshold if the received power is equal to or less than the first threshold;

a device for determining the data rate corresponding to the received power if the received power is equal to or greater than the second threshold; and

35

a device for requesting retransmission of the data packet by transmitting the determined data rate to the AN.

50. The apparatus of any of claims 47 to 49, the first threshold is calculated by accumulating a C/I corresponding to the data rate of the current data packet as many times as the maximum number of data packet transmissions

5 51. The apparatus of claim 49, the second threshold is calculated by dividing the required C/I corresponding to a current data rate by a predetermined margin and multiplying the number of already transmitted slots for the current data packet.

10 52. An apparatus for controlling transmission of a data packet from an access network (AN) in an access terminal (AT) of a mobile telecommunication system where the AN transmits the data packet in successive time slots each having a plurality of data bits and the AT receives the data packet from the AN, the apparatus comprising:

15 a device for comparing a received C/I of a forward pilot signal received from the AN with a predetermined first threshold; and

a device for requesting retransmission of the data packet by transmitting the determined data rate to the AN if the received power is equal to or less than the first threshold.

20 53. The apparatus of claim 52, the comparator detects the length of the data preamble of the received time slot, determines whether that is the low data rate and performs the comparison if the determined data rate is a low data rate, wherein the low data rate repeatedly transmits the same data packet two  
25 times or more.

54. The apparatus of claim 52, further comprising:

a device for comparing the received power with a predetermined second threshold if the received power is equal to or less than the first threshold; and

30 a device for requesting retransmission of the data packet to the AN if the received power is equal to or greater than the second threshold.

35 55. The apparatus of any of claims 52 to 54, the first threshold is calculated by accumulating a C/I corresponding to the data rate of the current data packet as many times as the maximum number of data packet transmissions.

56. The apparatus of claim 54, the second threshold is calculated by



dividing the required C/I corresponding to a current data rate by a predetermined margin and multiplying the number of already transmitted slots for the current data packet

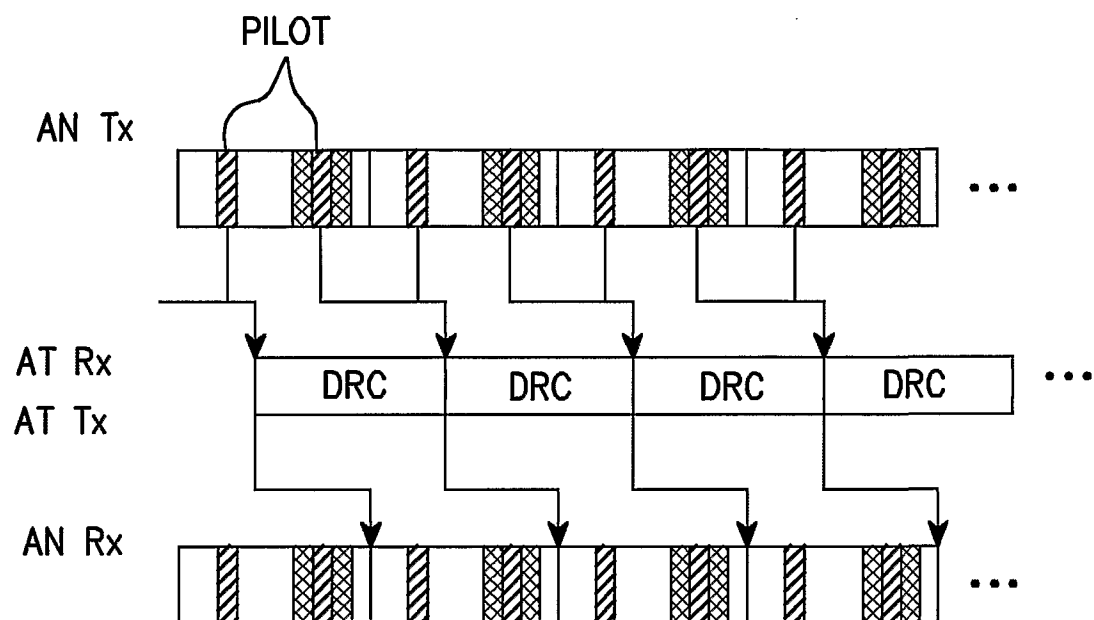


FIG. 1

2/8

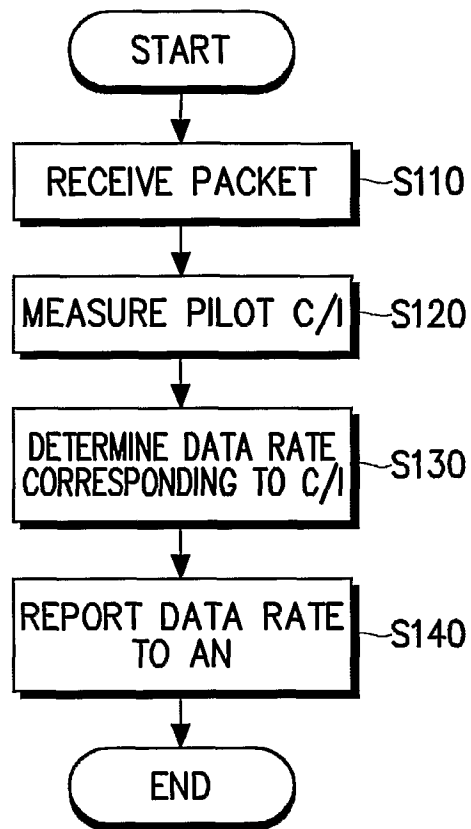


FIG. 2

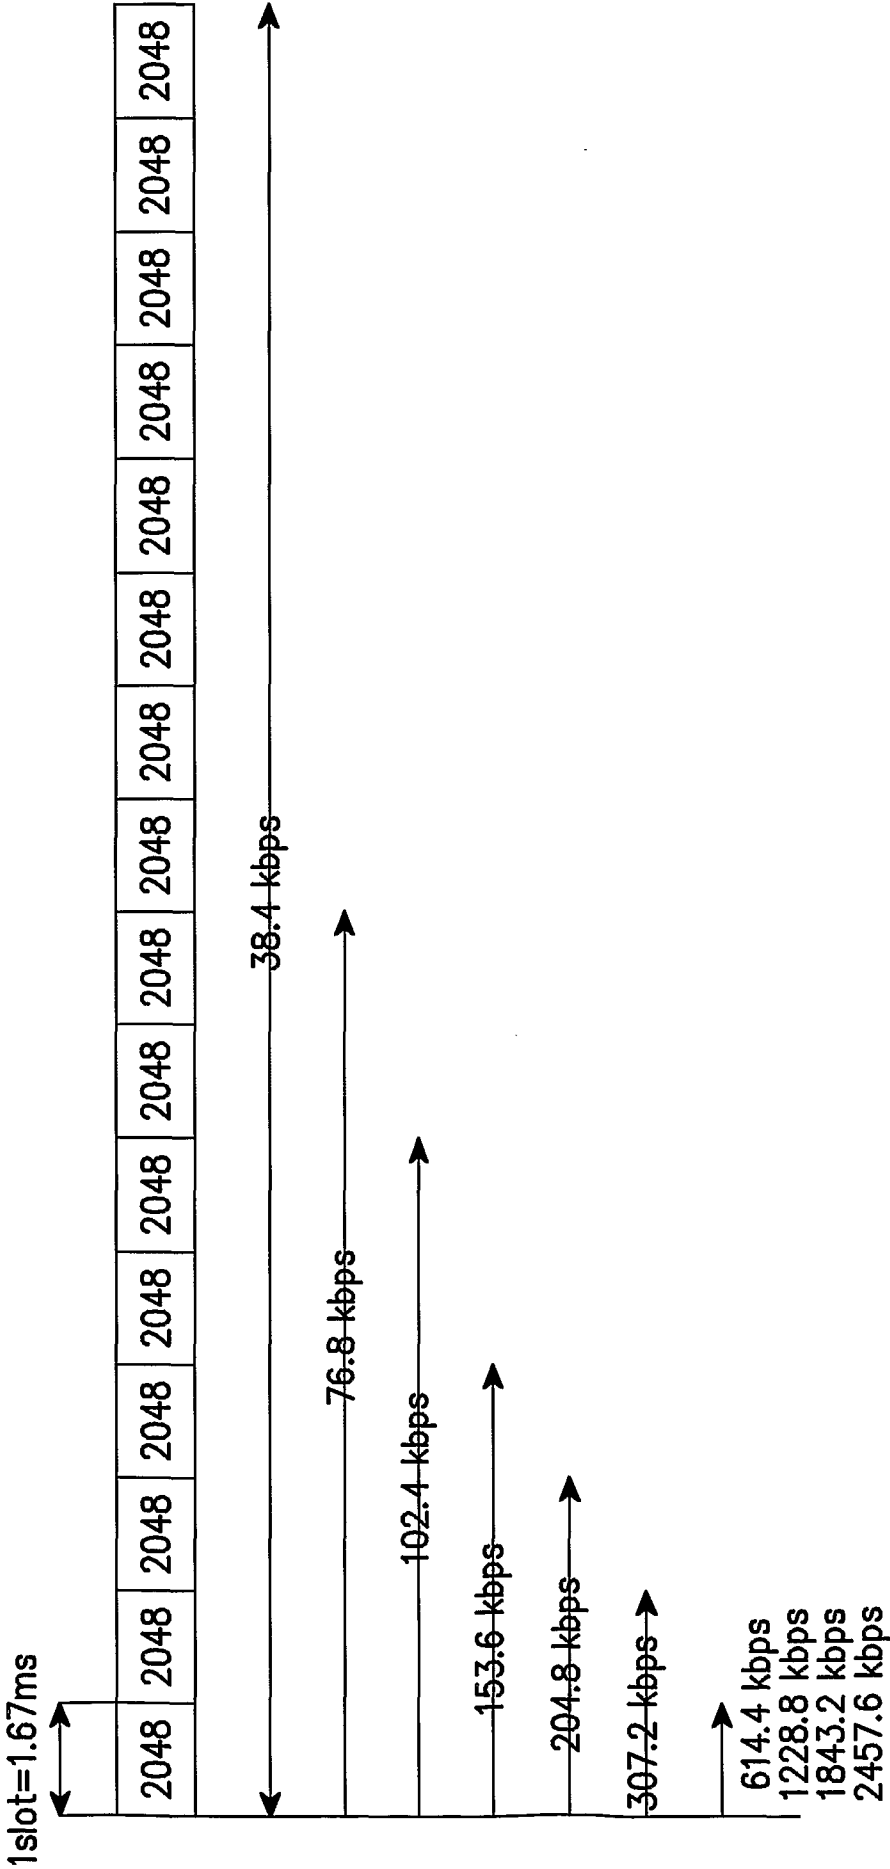


FIG. 3

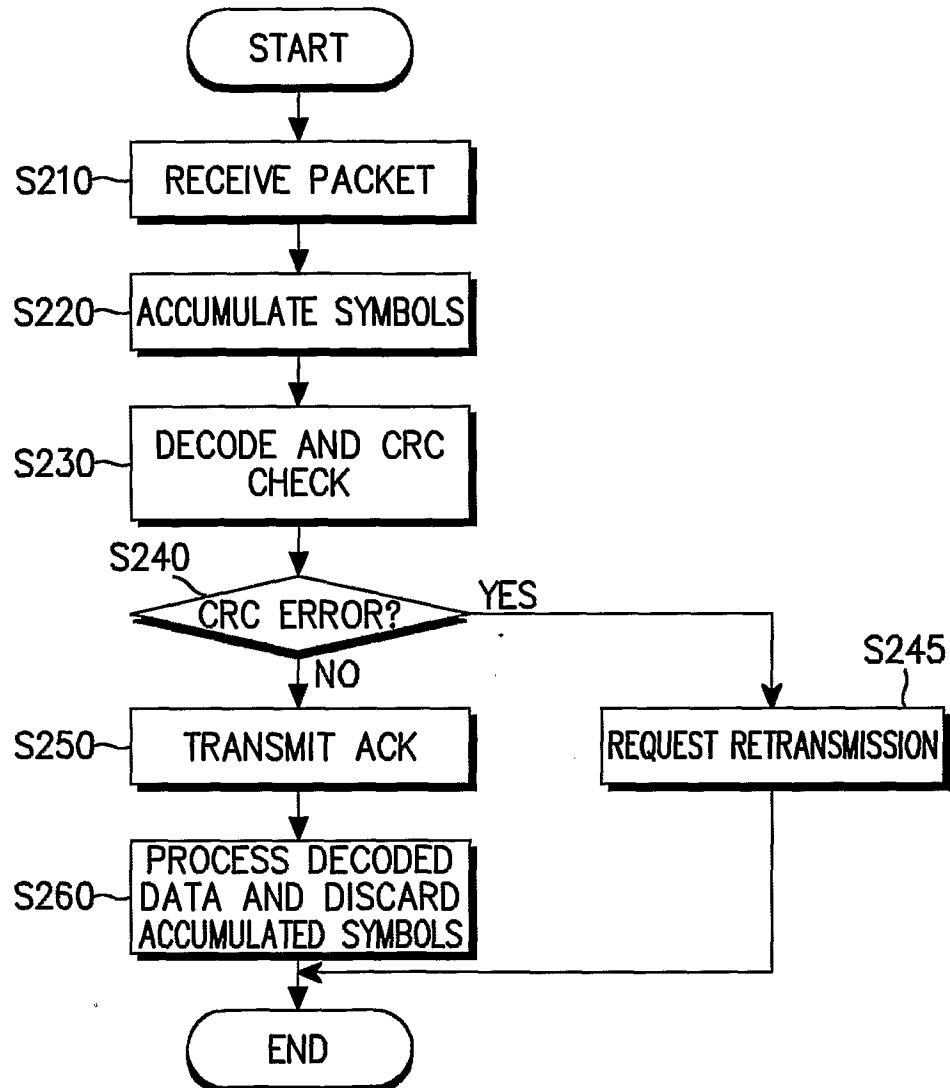


FIG. 4

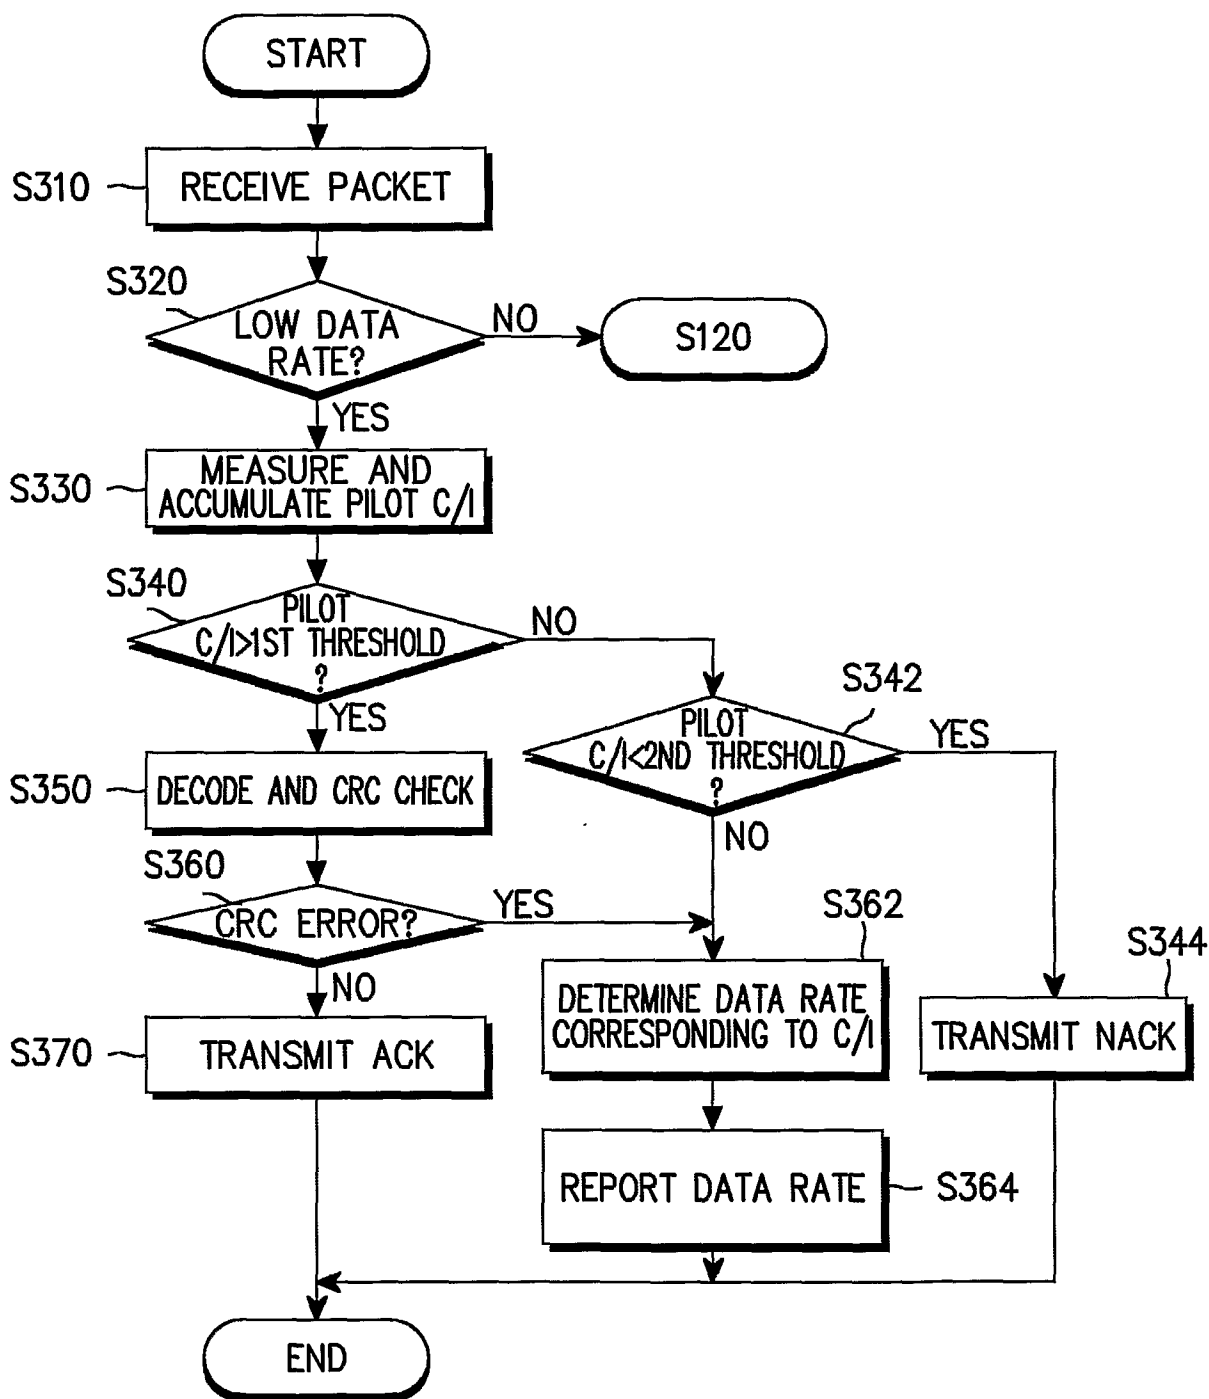


FIG. 5

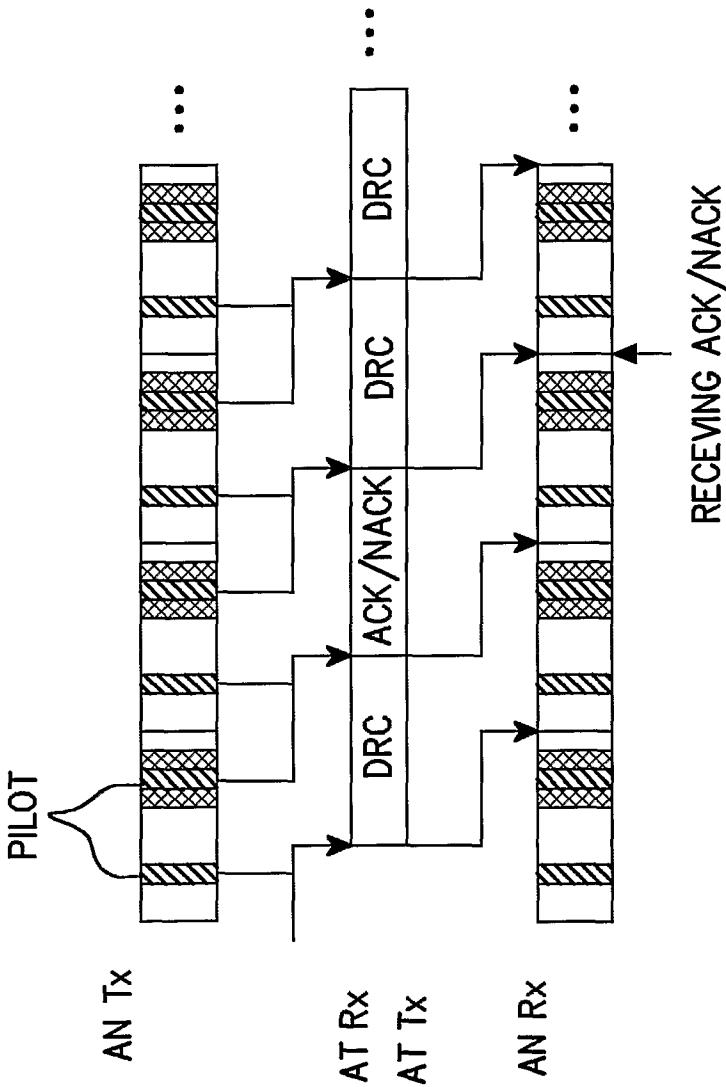


FIG. 6

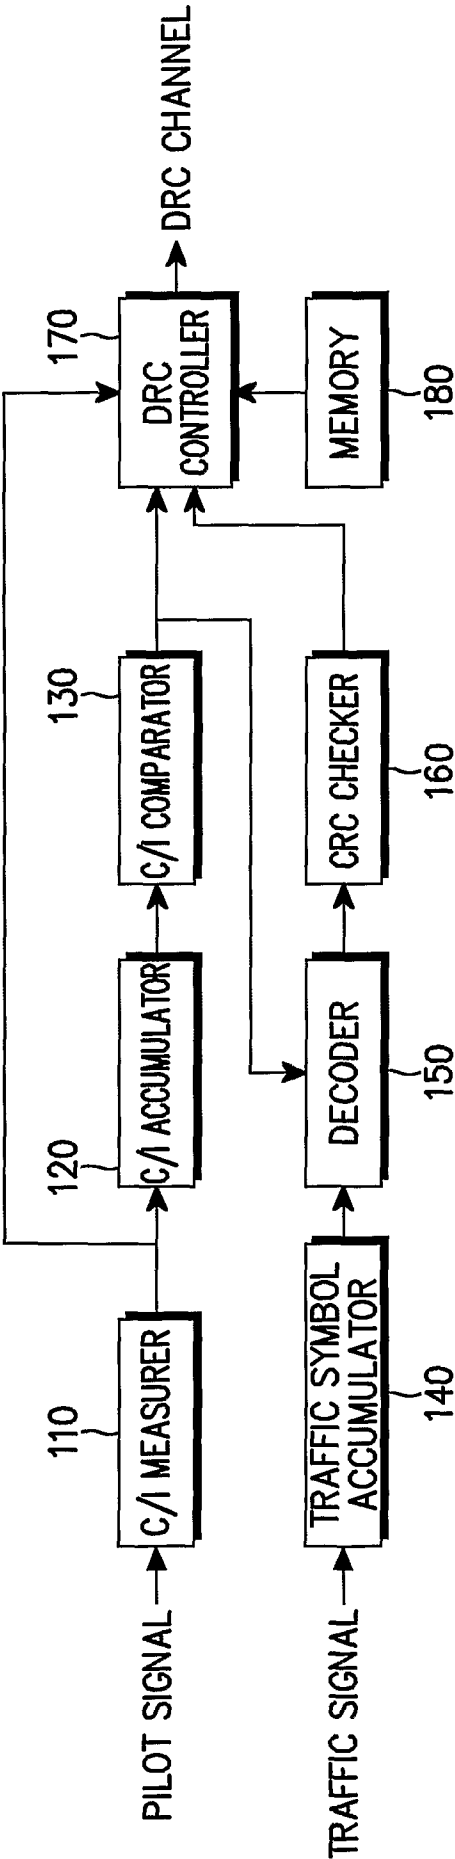


FIG. 7



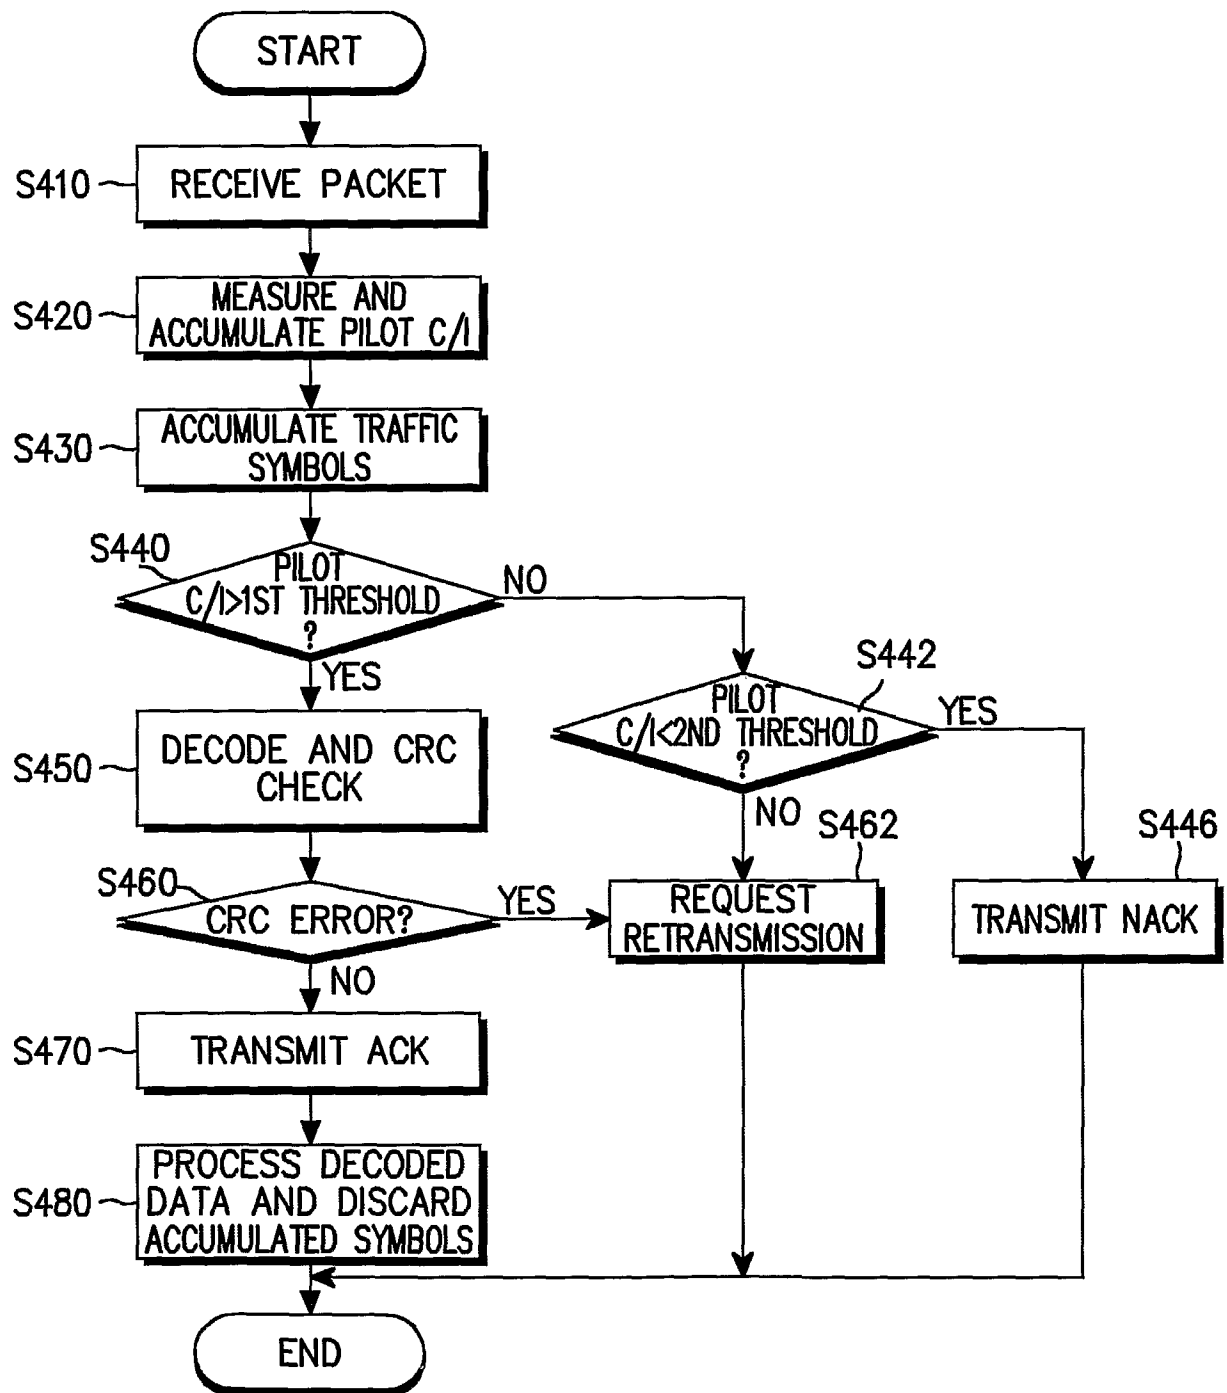


FIG. 8

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR01/01103

**A. CLASSIFICATION OF SUBJECT MATTER****IPC7 H04B 1/69**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H04B 1/69, 1/707

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
search terms : variable data rate, packet, retransmission, CRC, ARQ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	Y US 5828677 A 27 Oct. 1998 (Luncent Technologies Inc.) see summary of the invention and claim 1, 6, 11	1, 9, 16, 19
Y	Y US 5774496 A 30 June 1998 (Qualcomm Inc.) see summary of the invention and claim 1	1, 29
A	A US 5673266 A 30 Sep. 1997 (Oki Telecom.) see summary of the invention	1

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

20 NOVEMBER 2001 (20.11.2001)

Date of mailing of the international search report

21 NOVEMBER 2001 (21.11.2001)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office  
Government Complex-Daejeon, Dunsan-dong, Seo-gu, Daejeon  
Metropolitan City 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

JEONG, Jae Woo

Telephone No. 82-42-481-5718



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

PCT/KR01/01103

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5828677 A	27 Oct. 1998	EP 797327 A3	4 Oct. 2000
US 5774496 A	30 June 1998	EP 705512 A1	10 Apr. 1996
US 5673266 A	30 Sep. 1997	none	